


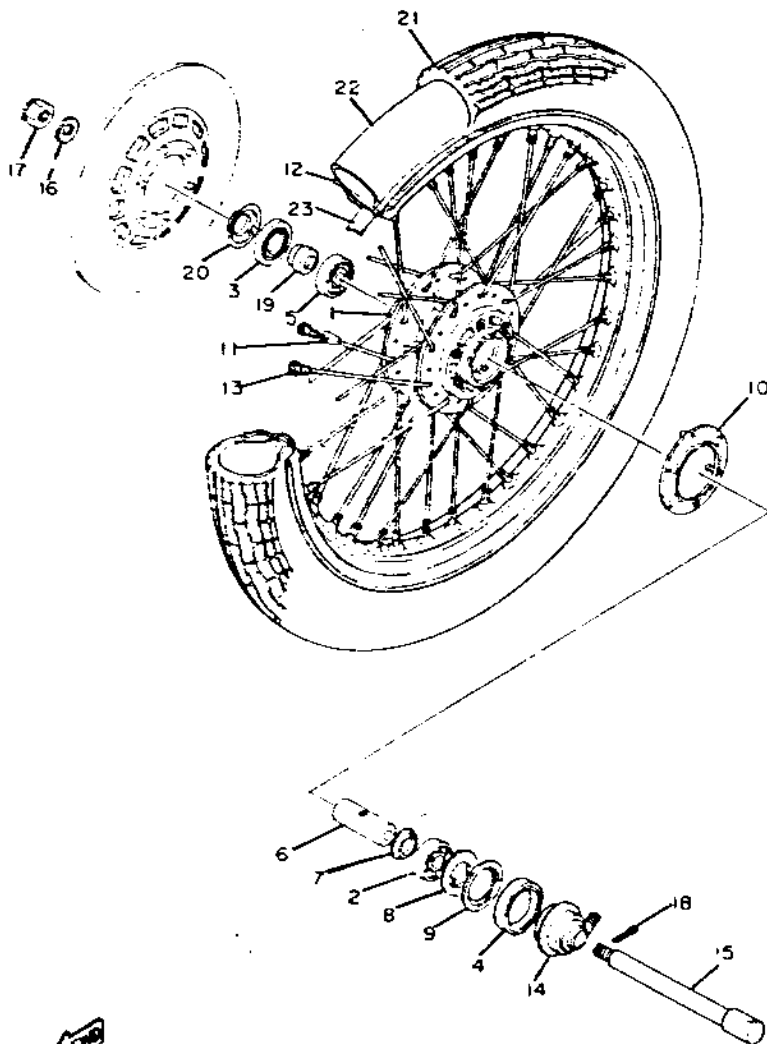

Ref. No.	Part Number	Description	Qty.	Remarks
1	341-25111-01-00	HUB, front	1	
2	93306-30306-00	BEARING (B6303).....	1	
3	93105-45017-00	OIL SEAL	1	
4	93102-28022-00	OIL SEAL	1	
5	93306-30307-00	BEARING (B6303).....	1	
6	90560-17126-00	SPACER	1	
7	152-25115-00-00	FLANGE, spacer 1.....	1	
8	341-25149-00-00	CLUTCH, meter.....	1	
9	341-25846-00-00	RETAINER, clutch.....	1	
10	1L9-25847-00-00	COVER, housing	1	
11	156-25398-00-00	BALANCER, wheel	1	U.N.
12	94418-19239-00	RIM (1.85-19)	1	
13	3G0-25104-00-00	SPOKE SET, front	1	
14	341-25190-01-00	GEAR UNIT ASS'Y	1	
15	341-25181-01-00	AXLE, wheel.....	1	
16	92901-14200-00	WASHER, plain	1	
17	90171-14020-00	NUT, castle (90171-14006)	1	
18	51401-30030-00	PIN, cotter	1	
19	90387-17433-00	COLLAR	1	
20	341-25118-00-00	COVER, hub dust.....	1	
21	94135-19391-00	TIRE (3.50-19).....	1	U.R. Yok
22	94235-19087-00	TUBE (3.50-19)	1	U.R. Yok
23	94325-19027-00	BAND, rim (2.50-19).....	1	U.R. Yok

Minimum Brake Lining Thickness	Front: 6.0mm Rear: 2.0mm
Tire Size (Nominal Pressure)	F:1.55S18(1.8kg/cm ² /22 psi) R:1.30/18 W: 87S2.0kg/cm ² /28 psi
Front Axle Nut	14 x 1.5: 10.8 m-kp
Front Axle Holder Nut	8 x 1.25: 1.4 m-kp