



No.	Number	Description	Qty.
1	341-25111-01-00	HUB, front	1
2	341-25104-00-00	SPOKE SET	1s
3	94135-19389-00	TIRE, front (3.50-19-4PR)	1
4	94232-19122-00	TUBE (3.20-19)	1
5	94418-19210-00	RIM (1.85-19)	1
6	94332-19085-00	BAND, rim (2.50-19)	1
7	1L9-25847-00-00	COVER, housing	1
8	90560-17126-00	SPACER (341-25117-01)	1
9	152-25115-00-00	FLANGE, spacer	1
10	93306-30306-00	BEARING (B6303RS)	1
11	341-25149-00-00	CLUTCH, meter	1
12	341-25846-00-00	RETAINER, meter clutch	1
13	341-25137-00-00	RING, stop	1
14	90201-25286-00	WASHER, plate (341-25147-00)	1
15	341-25135-01-00	GEAR, drive	1
16	90201-25490-00	WASHER, plate (152-17226-00)	1
17	93102-28022-00	OIL SEAL (SD-28-47-7)	1

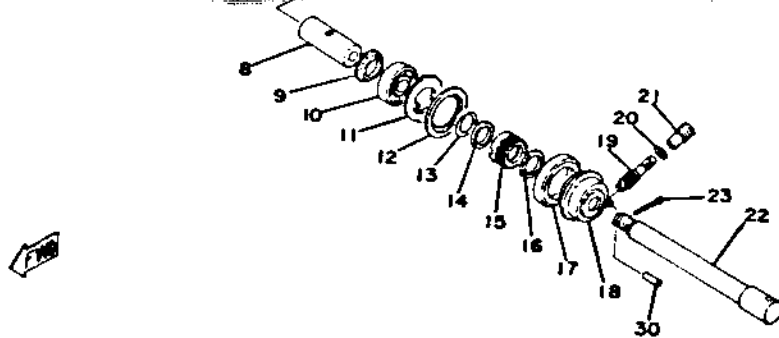

Minimum Brake Lining Thickness	Front: 6mm	Rear: 2mm
Tire Size (Nominal Pressure)	F:3.50S19 (1.6kg/cm <sup>2</sup> /23 psi) R:130/90S16 (2.0kg/cm <sup>2</sup> /29 psi)	
<b>TORQUE VALUES</b>		
Front Axle Nut	14 x 1.5: 10.7 m-kp	
Front Axle Holder Nut	8 x 1.25: 1.4 m-kp	

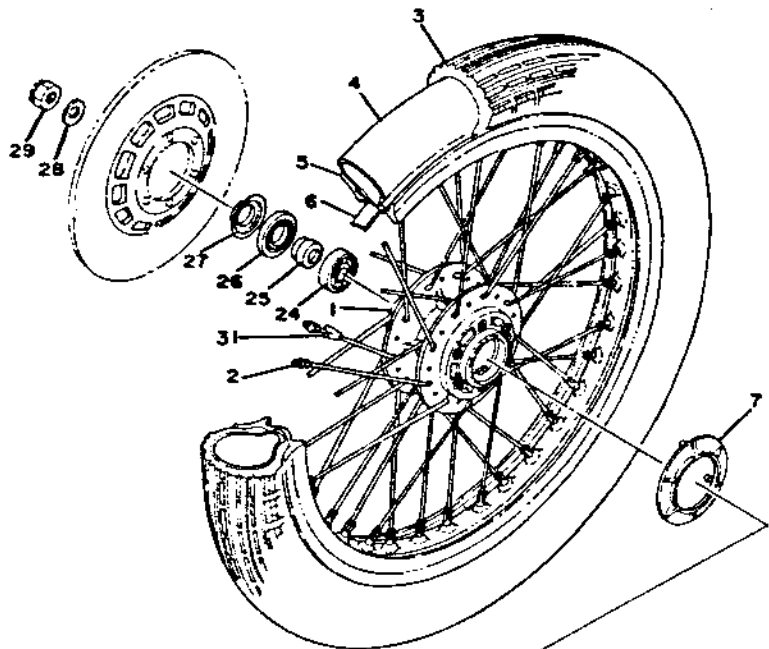

Ref. No.	Part Number	Description	Qty.
18	341-25190-01-00	HOUSING, gear unit (341-25191-01) .....	1
19	306-25138-00-00	GEAR, meter .....	1
20	102-18416-00-00	SHIM (6.2-9.5-0.8) .....	1
21	306-25136-00-00	BUSHING .....	1
22	341-25181-01-00	SHAFT, wheel .....	1
23	91401-30030-00	PIN, cotter .....	1
24	93306-30307-00	BEARING (B6303) .....	1
25	90387-17433-00	COLLAR (341-25183-00) .....	1
26	93105-45017-00	OIL SEAL (SDO-45-56-6) .....	1
27	341-25118-00-00	COVER, dust .....	1
28	92901-14200-00	WASHER, plain .....	1
29	90171-14020-00	NUT, castle (90171-14006) .....	1
30	91609-20014-00	PIN, spring .....	1
31	156-25398-00-00	BALANCER, wheel .....	U.N.

